




MI01 MI02 MI03 MI04 MI05 MI06

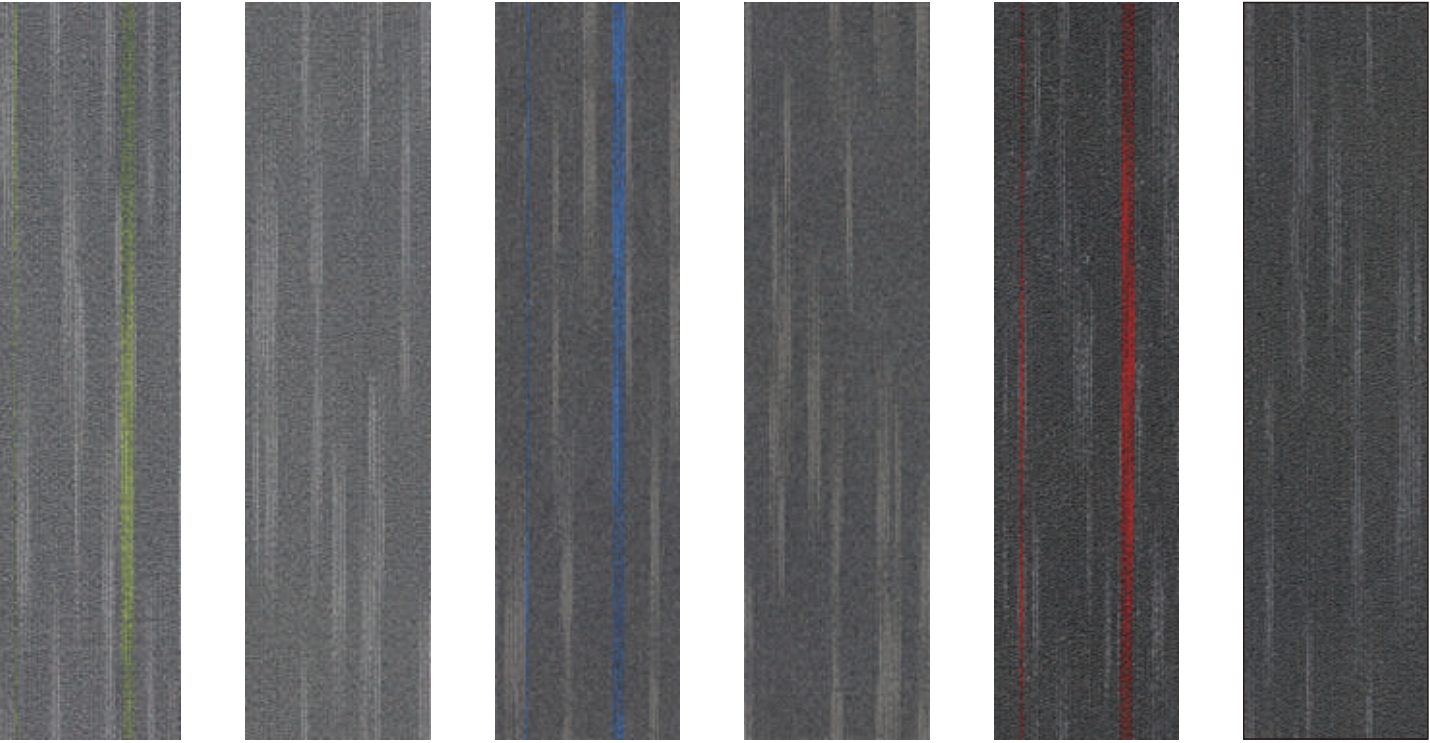

SPECIFICATIONS

STYLE NAME:	MILAN PLANK
CONSTRUCTION:	Tufted Textured Loop
YARN:	100% Universal Nylon
DYED METHOD:	100% Solution Dyed
GAUGE:	1/12"
PILE HEIGHT:	4mm± 0.5mm
TOTAL THICKNESS:	6mm±0.5mm
PILE WEIGHT:	500 g/m²
TILE BACKING:	Recycled PVC Backing
PRIMARY BACKING CLOTH:	Non-woven Polyester Spunbonded
YARN TREATMENTS:	3M Scotchgard Permanently Anti Static
ANTI-SOIL, ANTI-OIL TREATMENT:	3M Scotchgard
TILE SIZE:	25cm x 100cm
PACKING:	20 PCS
RADIANT PANEL:	Passes(ASTM E 648) Class 1
SMOKE DENSITY:	Passes(ASTM E 662) less than 450
STATIC PROPENSITY:	Passes(AATCC-134) less than 3.5 kv
SINGAPORE GREEN LABEL:	039-025-2280
WARRANTY:	10-Year Carpet Wear Warranty

* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.



GB/T 19001-2000 idt ISO9001:2000
GB/T 19001-2004 idt ISO14001:2004



MEMBER




CRI



039-025-2280
Environmentally Preferred Carpet

RECOMMENDED INSTALLATION METHODS:

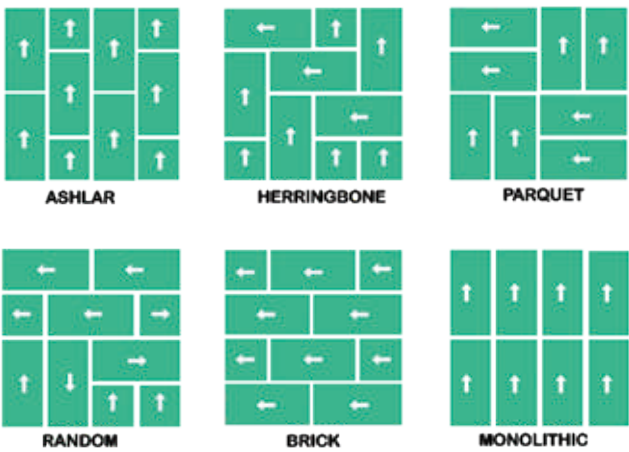

MILAN PLANK




039-025-2280
Environmentally Preferred Carpet



MILAN PLANK




MI01+MI02

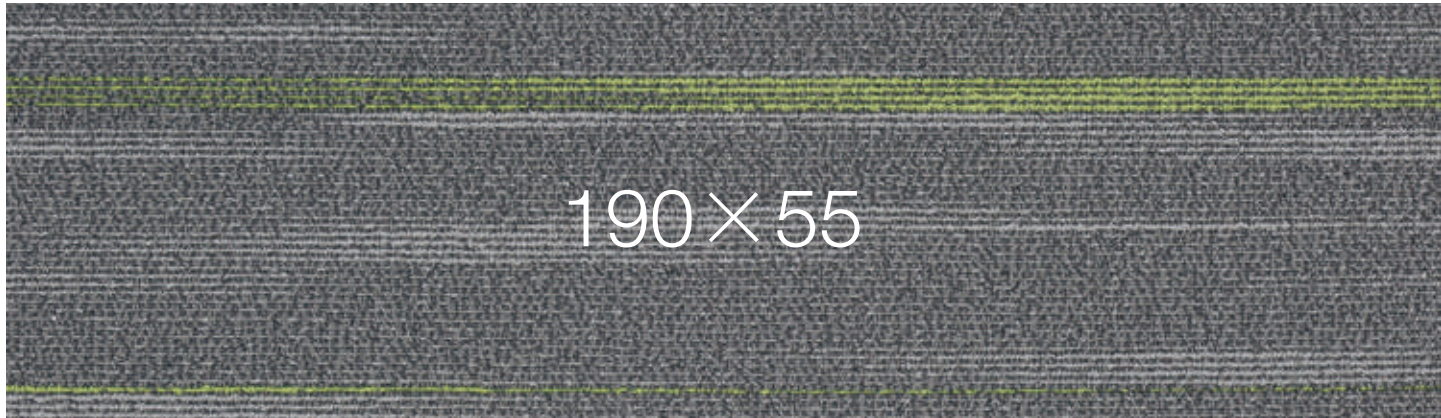

GREEN LINE MI01

25 x 100cm

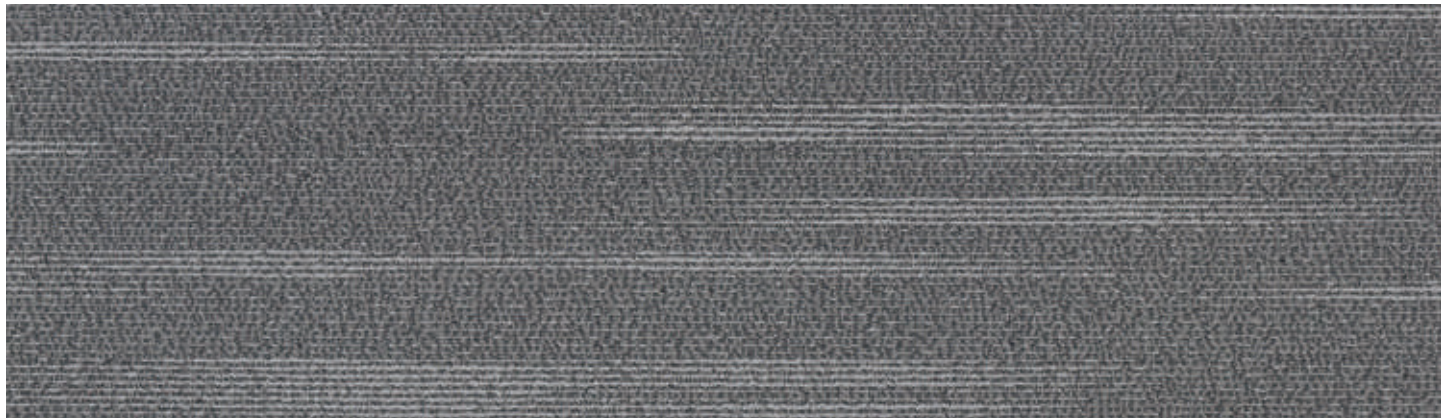

LIGHT TONE MI02


25 x 100cm

Samples displayed are for color and pattern representation only

MILAN PLANK




MI03+MI04

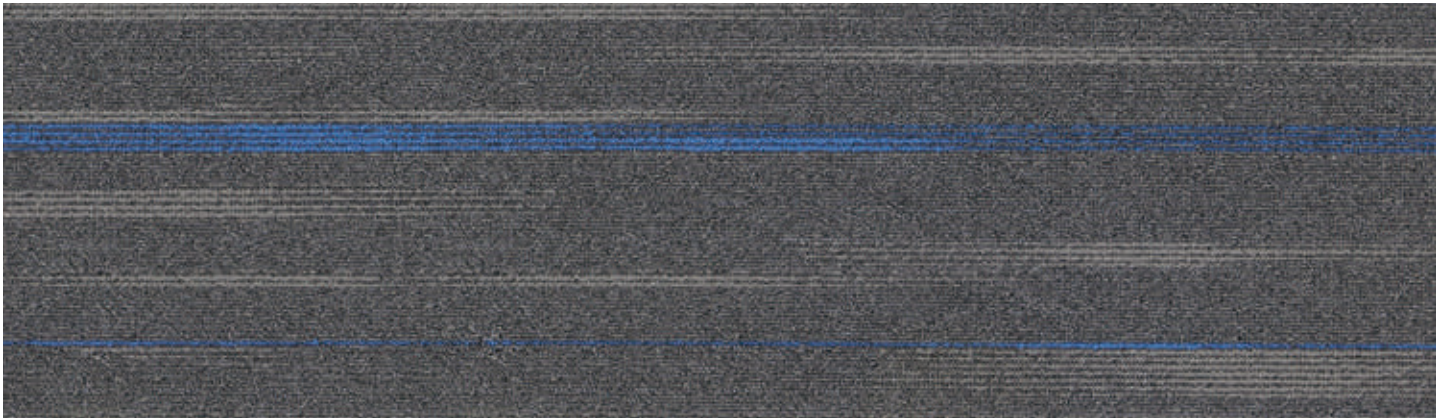

BLUE LINE MI03

25 x 100cm

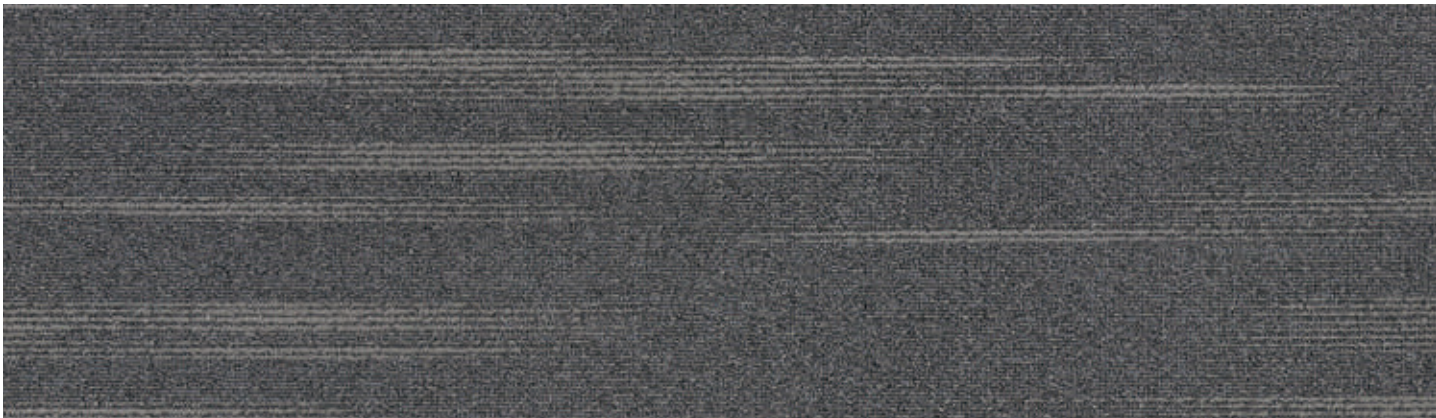


MID TONE MI04

25 x 100cm




MI05+MI06

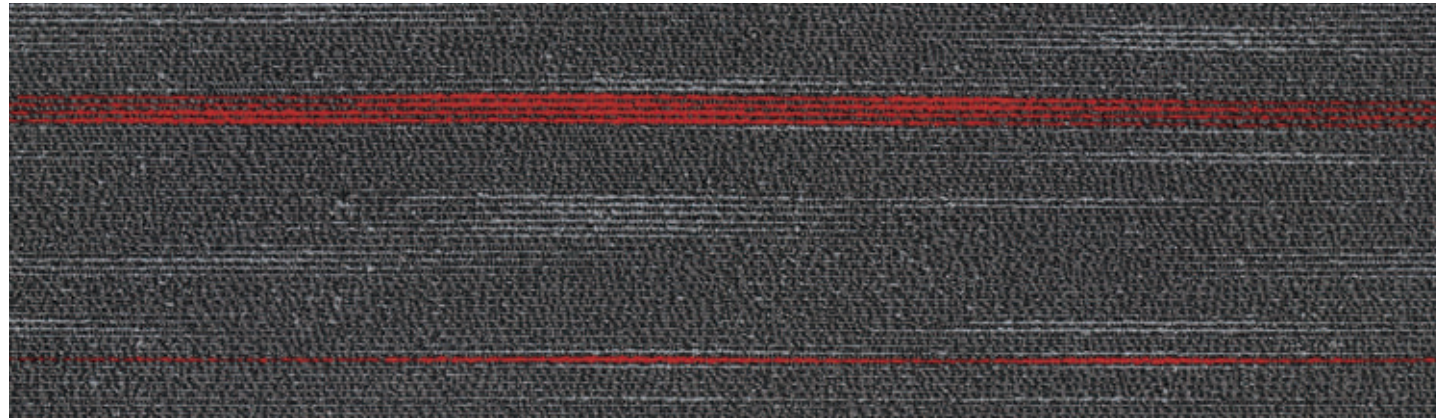

RED LINE MI05

25 x 100cm

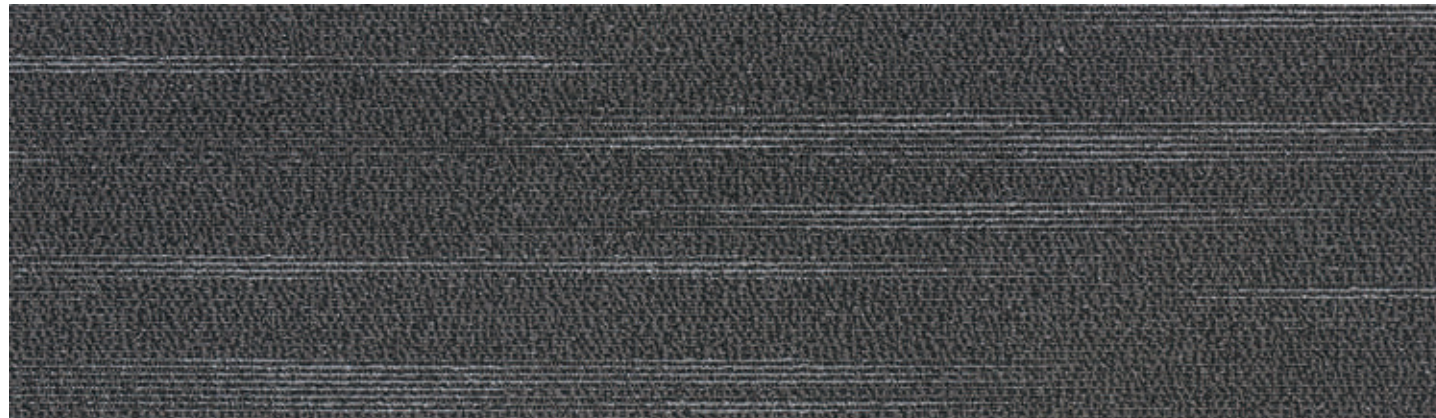

DARK TONE MI06

25 x 100cm