

🇦🇪 Made in Dubai, U.A.E.

**ROYAL VILLA™**  
**BROADLOOM**


100% SOLUTION DYED POLYESTER

**ELEGANT PATTERNS,  
TIMELESS LUXURY**



**1255 ENCHANTED GREY**

Pattern Repeat: 198 cm x 72 cm

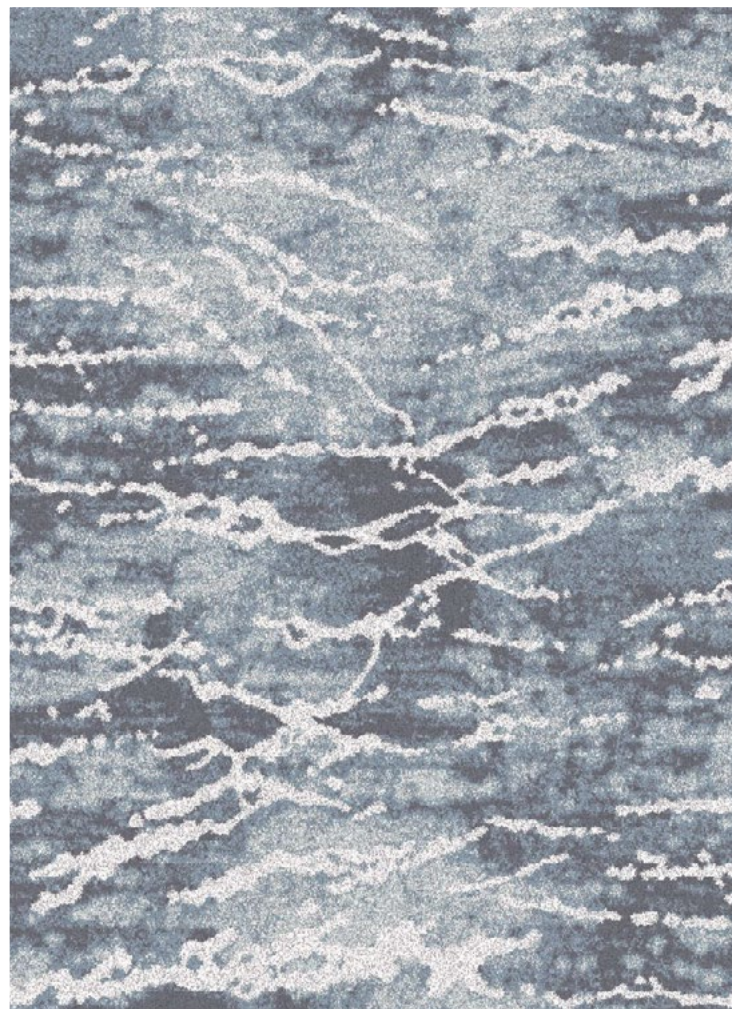

# 1277

CELESTIAL GREY



“

Improved Sound And Heat Insulation, Fire-Resistant Shielding, & Long-Term Defense Against Moisture, Mold, And Mildew.



Pattern Repeat: 198 cm x 72 cm



# 1255

ENCHANTED GREY

“

Action Fleece backing provides superior durability and insulation, safeguarding your home from impact noise.



Pattern Repeat: 198 cm x 72 cm



# 1233

## ENCHANTED CREAM



“

"Walk of Fame" is a soil-resistant treatment that extends the longevity of your carpet.



**1277 CELESTIAL GREY**

*The delightful sheen on the pile surface of Royal Villa results in beautiful shading effects as shown in the accompanying pictures, which enhances the natural look and beauty of the carpet. This is not a defect but an inherent characteristic of this lovely carpet collection.*

**Ideal for Residential & Moderate Hospitality Use in Bedrooms, Living Rooms, Dining Rooms, Study Rooms, Entrances, Hallways, Hotel Guest Rooms, Hotel Suites, Etc.**



**1233 ENCHANTED CREAM**



**1255 ENCHANTED GREY**



**1277 CELESTIAL GREY**

## ROYAL VILLA Specifications

Construction	1/8" Color Point Tufted Multi Level Cut Loop
Yarn Composition	100% Solution Dyed Polyester
Tufted Pile Weight	Ca. 1650 g/m <sup>2</sup> (48.66 oz/yd <sup>2</sup> ) (+/- 10%)
Total Weight	Ca. 2600 g/m <sup>2</sup> (76.7 oz/yd <sup>2</sup> ) (+/- 10%)
Pile Height	Ca. 7 mm (+/- 0.5 mm)
Total Height	Ca. 10 mm (+/- 0.5 mm)
Density (APYD)	5561.63 oz/yd <sup>3</sup>
Tuft Density	170,100 stitches/m <sup>2</sup> (+/- 5%)
Stitch Rate	54 per 10 cm
Primary Backing	Woven
Secondary Backing	Action Fleece Backing
Standard Roll Size	4m (+/-2%) x 30m (+/-2%)
Pile Treatment	Walk Of Fame
Pattern Repeat	198 cm (W) x 72 cm (L)

## Performance

VOC Emission	≤ 0.5 mg/m <sup>2</sup> /hour (CRI GLP) (ASTM D5116-17)
Flammability	Pass - 8 (ASTM D-2859 / FF1-70 / 16CFR1630)
Colorfastness To Rubbing	≥ 4 - 5 (EN ISO 105-X12)
Colorfastness To light	≥ 4 - 5 (ISO 105 B02:2014)
Colorfastness To Water	≥ 4 - 5 (ISO 105 E01:2013)
Formaldehyde Content	Not Detected (ISO 14184-1:2011)

## Warranties

10 Year Residential Carpet Wear Warranty  
Lifetime Antishock Carpet Warranty

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.



Elegance & Comfort in Modern Living

Made in Dubai, U.A.E.