

# ELEGANCE & CRAFTSMANSHIP

Ideal for Medium Commercial & Heavy Hospitality Use in Hotel Suites, Hotel Corridors, Conference Rooms, Offices, Auditoriums, Schools, Restaurants, Retail Establishments, Etc.



Pattern Repeat: 36.6 cm x 96 cm



2602 PARK ROYAL



**2605 REGENT** 



2609 SHANGRI-LA



**2610 SHERATON** 




**2611 CHANCELLOR** 



**2612 SILOSO** 





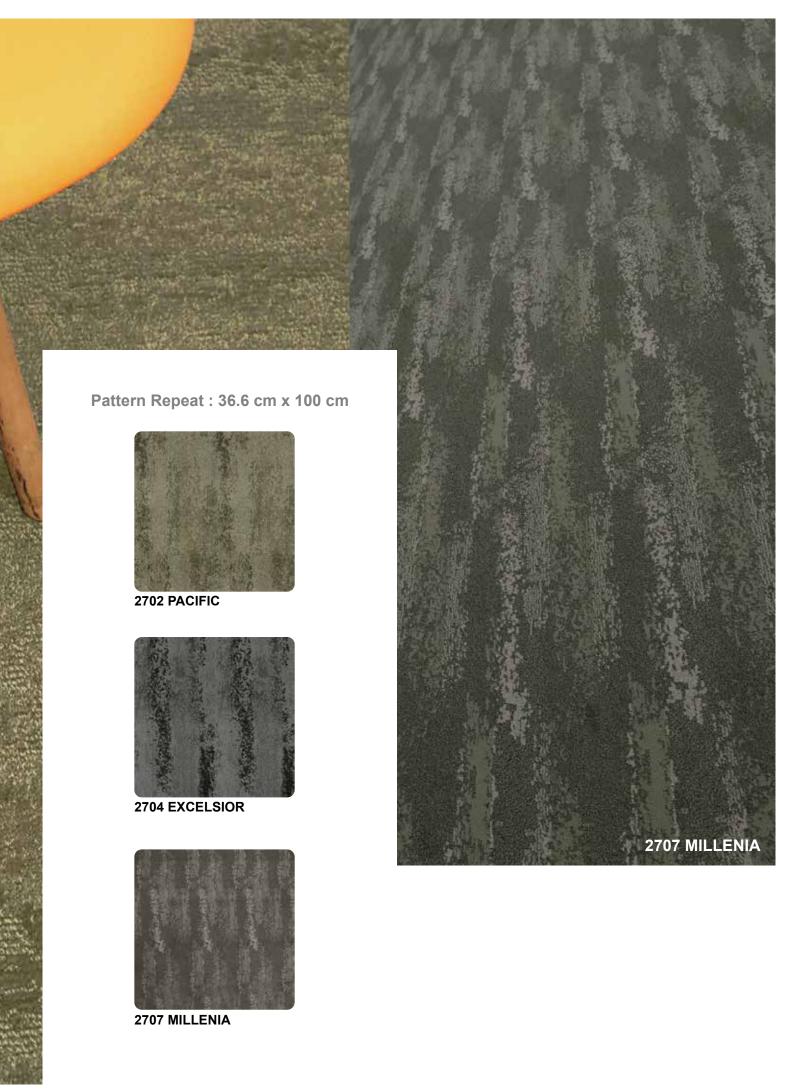



Pattern Repeat: 45.7 cm x 69.5 cm


















\*\*5135 FULLERTON



5134 SOFITEL



**5136 WESTIN** 

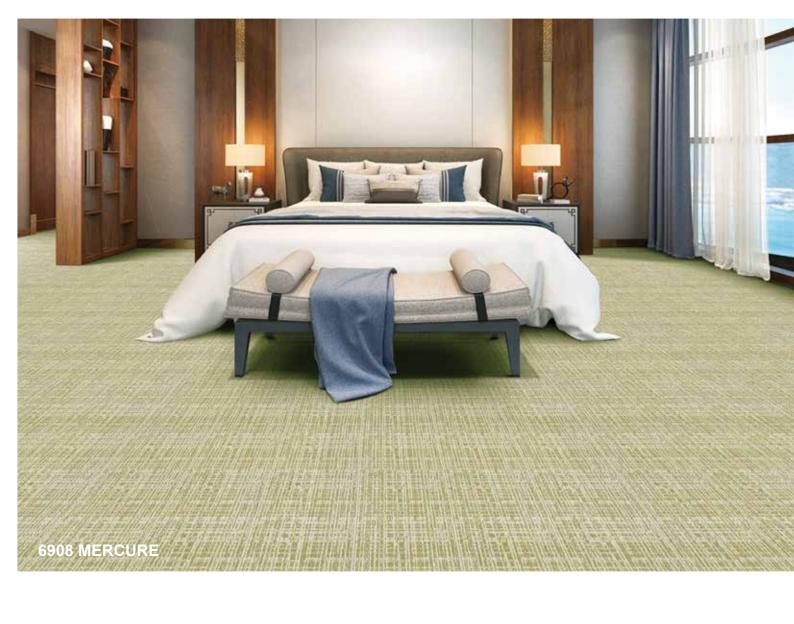

Pattern Repeat: 36.5 cm x 43.5 cm



**6901 BELMONT** 




**6902 MANDARIN** 



6904 CARLTON



**6905 REGIS** 



6906 PENINSULA



6907 RENDEZVOUS



6908 MERCURE







Pattern Repeat: 36.5 cm x 59.3 cm








# UNIVERSITY AUDITORIUM | SINGAPORE

#### 6906 PENINSULA ◀

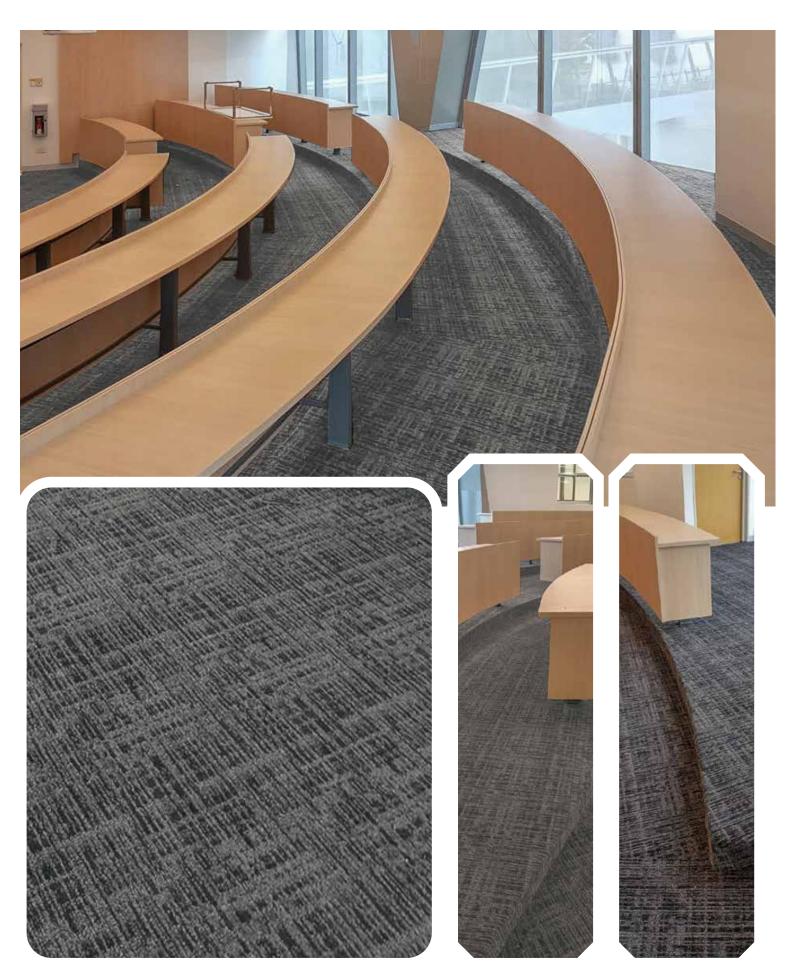


## RESTAURANT | SINGAPORE

▶ 2602 PARK ROYAL



# SPA | SINGAPORE

## 3607 NOVOTEL ◀

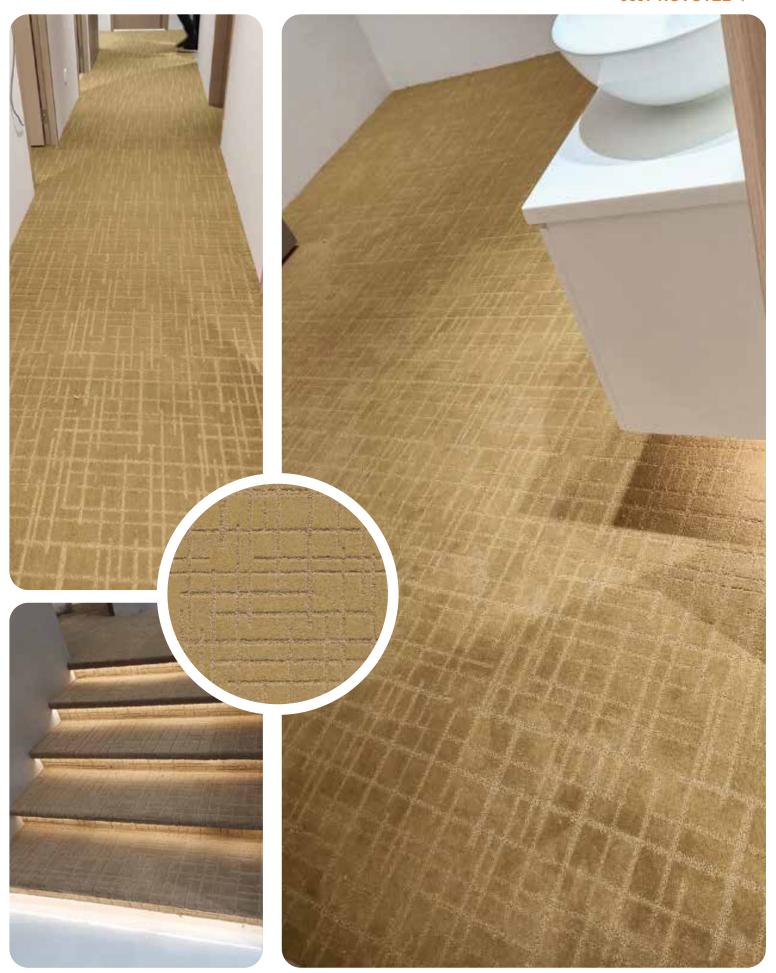


# HOTEL CORRIDOR | SINGAPORE

▶ 2707 MILLENIA



# AUDITORIUM | INDIA

#### 6902 MANDARIN ◀

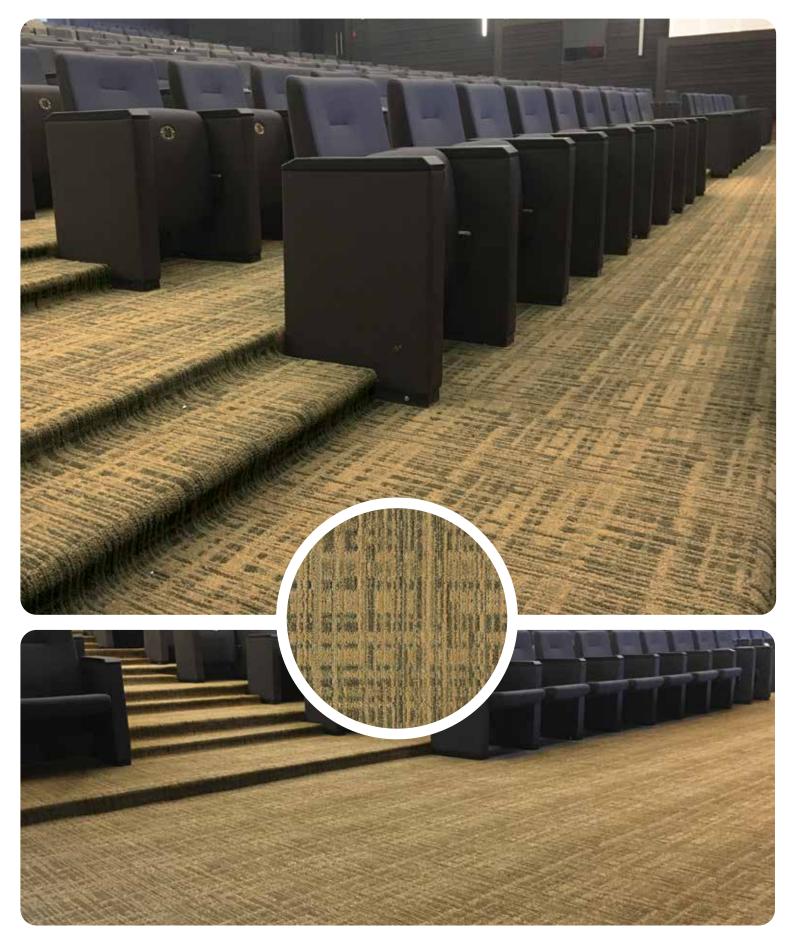





#### **LABELLE Specifications**

Construction Yarn Composition

**Tufted Pile Weight Total Weight** Pile Height Total Height

Density (APYD) **Tuft Density** Stitch Rate Primary Backing

**Secondary Backing** Standard Roll Size

1/10" Tufted Cut & Loop Pattern

100% Solution Dyed Nylon, 2-Ply Heatset (with 35% recycled content)
Ca. 1085 g/m² (32 oz/yd²) (+/- 10%)
Ca. 1870 g/m² (55.14 oz/yd²) (+/- 10%)

Ca. 6.5 mm (+/- 0.5 mm) Ca. 8.5 mm (+/- 0.5 mm) 4500 ozs/yd3

119,888 stitches/m<sup>2</sup> 47.2 per 10cm

PP Woven Cloth (7% recycled content)

ActionBac®

3.66m (+/-2%) x 30m (+/-2%)

#### Performance

Static Control Tuft Bind **Dimensional Stability Indoor Air Quality** 

Flammability - Pill Test

- Radient Panel

- Smoke Density Colourfastness

- to light

- to wet & dry crocking - to ozone

**Total Recycled Content** 

#### (as tested by ITTS Inc. USA)

Pass - Max. 4 kV (AATCC-134-1996) Pass - 5.4 lbs (ASTM-D-1335) Pass - Max. 0.2% change (AACHEN) **CRI Green Label Plus** 

Pass - 8 (ASTM-D-2859-06)

Pass - Class II (ASTM-E-648-10) Pass - Max. 450 (ASTM-E-662-06)

Excellent - 5 (AATCC-16E) Excellent - 5 (AATCC-165) Excellent - 5 (AATCC-129) 20% (By Weight)

#### Warranties

10 Year Commercial And Hospitality Carpet Wear Warranty Lifetime Antishock Carpet Warranty

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual color may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.









