





# PRECAST PLANK




Black Teal

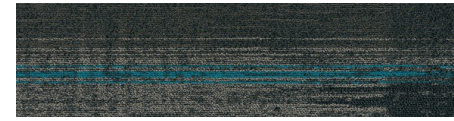


Blue Pea

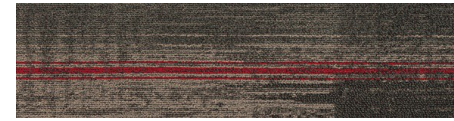

Coco Red

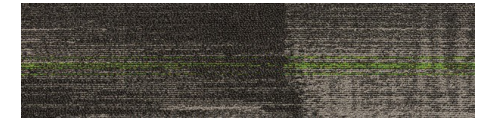

Grey Lime

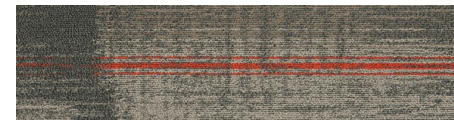


Orange Peel

## Recommended Installation Methods



Ashlar



Herringbone



Basketweave



039-017-2094  
Environmentally Preferred Carpet

## Specifications

Construction  
Yarn  
Dye Method  
Pile Weight  
Total Thickness  
Backing  
Tile Size

Multi-Level Tufted Pattern Loop Pile  
BCF Synthetic Fiber  
100% Solution Dyed  
22 oz/yd<sup>2</sup>  
7.0mm  
FlexiBac  
25cm x 100cm

## Performance

Radiant Panel  
Smoke Density  
Static Propensity  
Color Fastness to Light  
Dimension Stability  
Foot Traffic Recommendation TAAR  
Antimicrobial  
Certificates

ASTM 648 Class 1  
ASTM 662 Less than 450  
AATCC 134 Less than 3.5Kv  
AATCC 16E ≥4  
AACHEN ≤0.2%  
General Commercial  
Health Guard  
Singapore Green Label Certification  
Singapore Green Building Product Certification (4 thick)